

BOARD OF
BUILDING AND SAFETY
COMMISSIONERS

MARSHA L. BROWN
PRESIDENT

VAN AMBATIELOS
VICE-PRESIDENT

VICTOR H. CUEVAS
HELENA JUBANY

ELENORE A. WILLIAMS

CITY OF LOS ANGELES

CALIFORNIA



ANTONIO R. VILLARAIGOSA
MAYOR

DEPARTMENT OF
BUILDING AND SAFETY
201 NORTH FIGUEROA STREET
LOS ANGELES, CA 90012

ROBERT R. "BUD" OVROM
GENERAL MANAGER

RAYMOND S. CHAN, C.E., S.E.
EXECUTIVE OFFICER

Mario Orlando
Thermafit Industries, Inc.
723 Sonora Ave, unit B
Glendale, CA 91201

Telephone: 818-770-6783

Models:

1 1/2" POC-150, 2" POC200, 3" POC300, 4" POC-400, 6" POC-600, 8" POC-800

File Number: M-120010

Effective Date: 08/14/2012

Expiration Date: 03/01/2013

Manufacturer: SAME

Item: NO HUB COUPLING

PLEASE REFER TO THE APPLICATION NUMBER ON ALL CORRESPONDENCE, PHONE CALLS & SAMPLES

The item processed under the above file number has been tested, examined and found to comply with applicable Los Angeles Plumbing Code (LAPC) and/or Los Angeles Mechanical Code (LAMC) and is hereby approved unless revoked for cause.


This letter or the letterhead copy may not be reproduced for use in labeling or advertising, but copies of this letter may be used within your organization and shown as evidence of approval.

CONDITIONS OF APPROVAL:

1. This coupling is approved for joining hubless cast iron soil pipe and fittings for drain, waste, and vent piping above and below ground, inside and outside of buildings, in all occupancies as long as it does not in violation of the current LAMC and LAPC.
2. Installation shall be in compliance printed installation instructions from the manufacturers and IAPMO IS-6 of LAPC, 2011 Edition.
3. The coupling shall be identified with name of the manufacturer, rated working pressure, clamp torque, and size.

Each item shall have the name or trademark of manufacturer and model number where it will be visible for inspection.

In order to renew this approval, an application and reexamination fee must be submitted on or before the expiration date shown above. Arrangement shall be made to remove any test samples remaining in the Laboratory. Samples remaining after 21 days from the date of this notice will be shipped collect by the most convenient carrier or disposed of in accordance with applicable regulation.

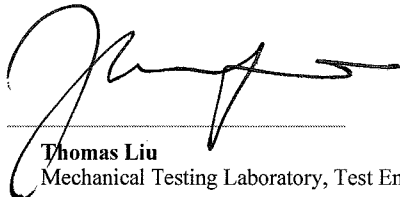

Thomas Liu
Mechanical Testing Laboratory, Test Engineer



Richard Zee
Plumbing / Mechanical Inspection
Inspection Bureau